



SERIES 11

FULL PORT 2 PC BRASS

BALL VALVE

600 CWP FORGED BRASS BLOWOUT PROOF STEM LOCKABLE LEVER AND OVAL HANDLE BRASS OR STAINLESS STEEL TRIM

Series 11


2

12

PARTS & MATERIAL

PART NO.	PART NAME	QTY.	MATERIAL
1	Body	1	Brass C37700
2	End Piece	1	Brass C37700
3	Ball	1	Brass/304 Stainless
4	Seat	1	PTFE
5	Seat/Seal	1	PTFE
6	O-RIng	1	NBR
7	Stem	1	Brass/304 Stainless
8	Packing	1	PTFE
9	Packing Nut	1	Brass C37700
10	Handle	1	Plated Steel
11	Lock Washer	1	Plated Steel
12	Handle Nut	1	Plated Steel
13	Handle Sleeve	1	PVC

13

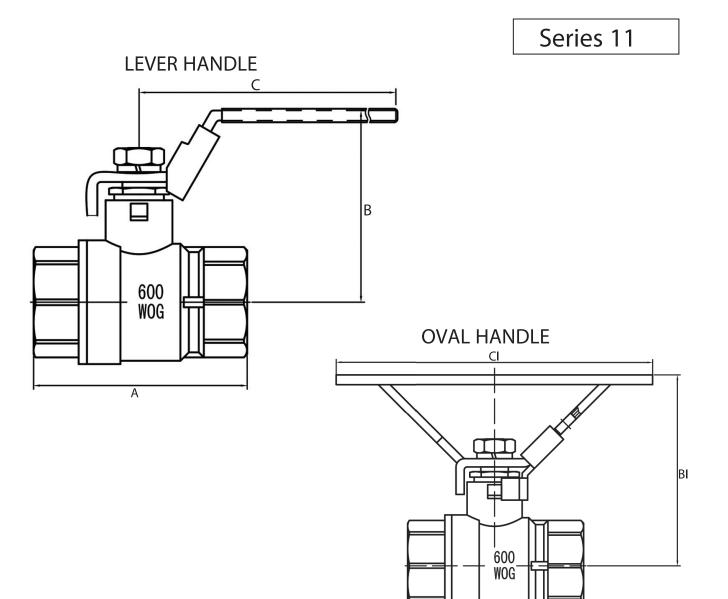

DIMENSIONS (INCHES)


SIZE	А	В	С	BI	Cl
1/4″	1.73	2.11	4.48	2.09	3.39
3/8″	1.75	2.11	4.48	2.09	3.39
1/2″	2.24	2.60	4.48	2.22	3.39
3/4″	2.52	2.84	4.81	2.59	4.53
1″	2.97	3.01	4.81	2.74	4.53
11/4″	3.44	3.36	5.59	3.67	6.30
11/2″	3.88	3.61	5.59	3.89	6.30
2″	4.29	3.91	5.59	4.18	6.30
21/2″	5.53	4.83	7.68		
3″	6.14	5.98	7.95		
4″	7.79	5.98	8.86		


Α

APPLICABLE STANDARDS

CSA	ANSI Z21.15/CSA 9.1 For 1/2 psig	
CSA	ASME B16.44/CR91-002 For 5 psig	
CSA 1/2"-2"	ASME B16.33/CGA3.16 For 125 psig	
CSA	ASME B16.38/ CGA3.16 For 125 psig	
THREADED ENDS	ASME B16.11	

SIZE	CV (GPM)	WEIGHT (lbs)
1/4″	5	0.31
3/8″	5	0.29
1/2″	24	0.44
3/4″	35	0.75
1″	47	1.10
11/4″	81	1.75
11/2″	1.5	2.40
2″	240	3.70
21/2″	320	7.30
3″	580	10.00
4″	970	18.50





TEMPERATURE °F

